

# PC<sup>3x</sup> Peltier Controlled Cyclonic Chamber

Thermally stabilized inlet system for ICP-OES or ICPMS



## Summary


The PC<sup>3x</sup> is a compact Peltier heated and cooled inlet system which incorporates the ESI cyclonic spray chamber. The PC<sup>3x</sup> heats or cools the outer walls of the cyclonic spray chamber, reducing the water or solvent vapor loading on the plasma, resulting in enhanced stability and performance. The PC<sup>3x</sup> can be connected to any ICP-OES or ICPMS.

The spray chamber can incorporate any 6 mm nebulizer and is ideally suited to the PFA-ST Microflow nebulizer.


## Benefits

- Temperature control from -10 °C to +80 °C
- Heating function to increase sensitivity
- Cooling function to reduce solvent-related interferences
- Thermal stabilization of spray chamber improves long-term stability
- Stability to ±0.1 °C
- Temperature logging feature
- Last set temperature saved for stand alone operation
- USB or Bluetooth connectivity
- Remote monitoring and control
- Fast rinse-out using PFA-ST nebulizer and o-ring-free cyclonic spray chamber
- PC<sup>3x</sup>-SSI model for isotope ratio determination or other high precision analyses
- Completely o-ring-free for organic solvents analysis
- Organic solvent analysis using PFA-50 nebulizer
- Aqueous sample analysis using PFA-ST nebulizer

## Results

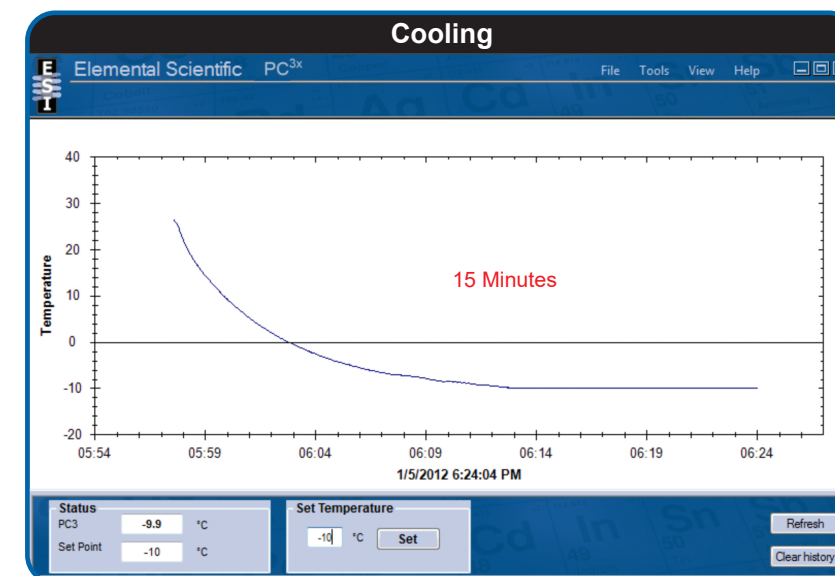

26 °C to -10 °C

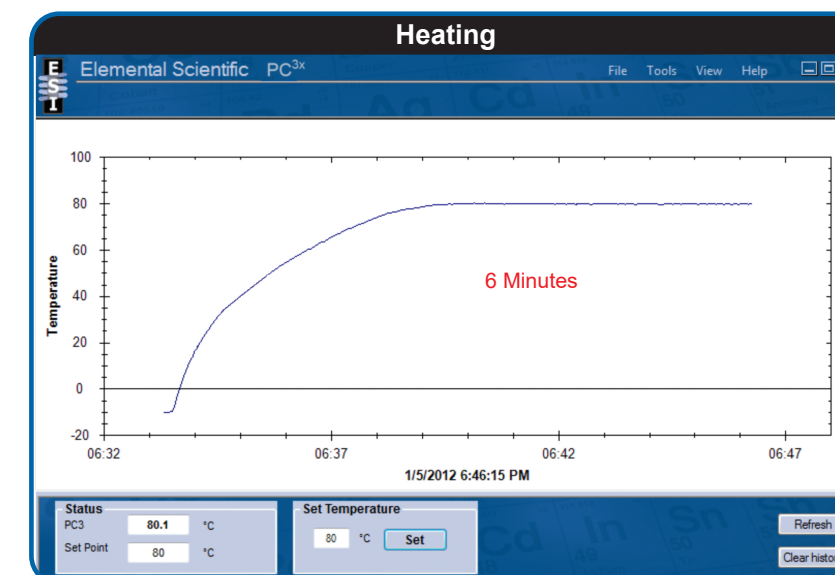

-10 °C to 80 °C



© Elemental Scientific | 7277 World Communications Drive | Omaha, NE 68122  
Tel: 1-402-991-7800 | [sales@icpms.com](mailto:sales@icpms.com) | [www.icpms.com](http://www.icpms.com)

B-24070