EvapoClean Features

Fluoropolymer Elbow

- Connects PFA Sample and Solvent bottles to provide closed environment

CleanClever Wells

- Heated wells for digesting samples & cleaning bottles with acid vapor

Purification Ports

- Support multiple vessel kits for simultaneous concentration or evaporation

Graphite Heating Block

- PFA-coated graphite assembly inert to acid corrosion & uniformly heats vessel

Thermal Protection

- PTFE outer shell protects user from heated block

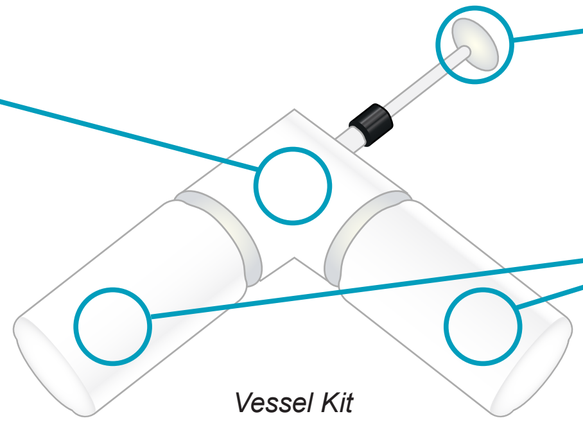

Vessel Kit

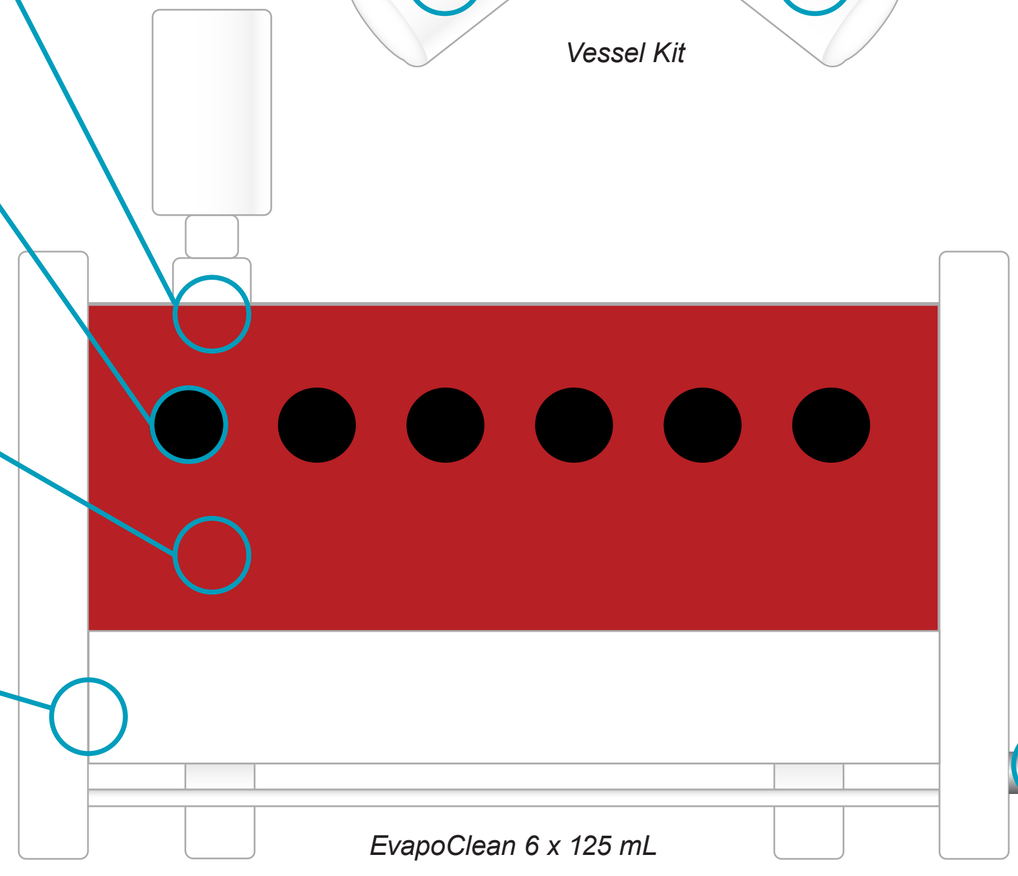

EvapoClean 6 x 125 mL

Semi-Permeable Membrane

- Optional vent releases pressure while preventing external contamination for higher temperatures and volatile sovents

PFA Bottles

- Sample and Solvent bottles are inert to corrosion & reduce contamination

External Control

- 1.7 m (5.5') PTFE-shielded control cable
- Regulator located remote from EvapoClean module

Temperature Control
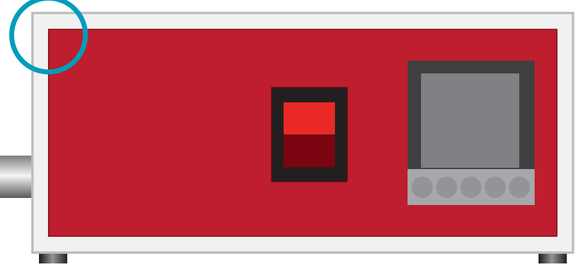
- 110 or 208-240 V supply
- Precise control up to 250°C
- Digital control with programmable timer